

Duo (Opera/Clip) light

Operating Instructions

RATstands

1. ATTACHING THE LAMP

For Opera Lights


Insert the spigot at the end of the lamp arm into the socket at the top of the Opera Stand stem, and use the Allen key supplied with the stand to slacken the screw just enough to enable the lamp arm spigot to be fully inserted. Tighten the screw until the right level of friction is achieved.



For Clip Lights

The lamp is designed to fit a variety of music tray styles and it is therefore fitted with an adjustment screw which should be set according to your particular tray, as follows:

Clip the lamp to the top of the tray, and adjust the screw until its tip just touches the underside of the tray. The clip should now make firm contact with the underside of the tray at two points, as indicated by the arrows.

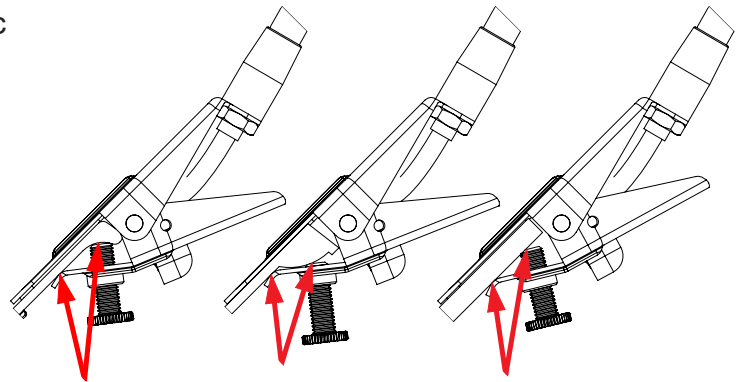

Once you have made this adjustment, you can fit and remove your lamp merely by squeezing the spring clip. You should not readjust the screw unless you wish to fit the lamp to a different style of tray.

2. IDS ASSEMBLY

If the light was supplied with the optional RATstands IEC Daisychaining system (IDS) box, then a maximum of up to 15 lights can be daisychained through the IDS box. The IDS box clips to the bottom of the music stand stem.

