

---


# Duo LED Opera Conductor's Light

A mains powered double width conductor's light that can be dimmed by a mains dimmer. Simply plug and play with this professional range light.


---




**RAT**stands

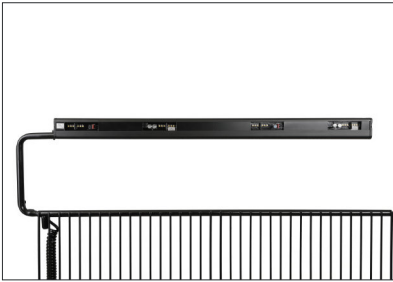

The light can be attached to the Opera Conductor Stand by fitting the light arm into the socket of the stand's tray, and tightening the screw with an Allen Key.

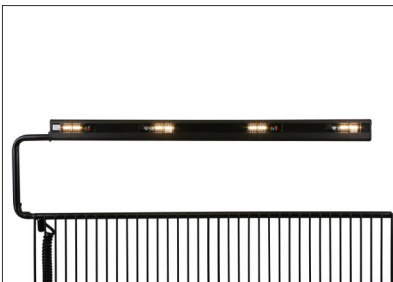

24 state-of-the-art mains voltage LEDs give very bright and even illumination all over the score, and have a colour temperature of 4000K which is relaxing for the professional musician, whilst making it easy to read scores. Precision light guides ensure excellent cut off of the light, resulting in minimal light spillage.

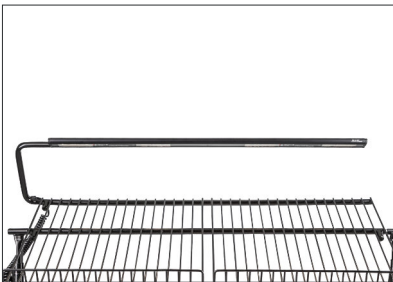

Very slim housing ensures the conductor's view of the musicians is not obstructed.



The light can be powered from a single 230v/120v source using the IEC daisy-chain system. You can link up to 15 lights in one chain.

# Detailed Specification

## Specifier's description

Integral light for The Opera Conductor's Stand. Double width slim aluminium housing, 16mm thick, containing 24 LEDs with a colour temperature of 4000K. Powered directly from the mains without the need for an intermediate power supply, and dimmable by leading or trailing edge phase dimmers.

Construction	
Structural parts	Steel
Lamp housing	Aluminium
Cable type	Mains cable with PVC outer sheath
Electrical connector type	Mains plug

Dimensions	
Profile of lamp as seen by user: thickness	16mm [0.6in]
Profile of lamp as seen by user: width	798mm [31.4in]
Rotation of lamp housing	300°
Cable length (from clip, fully stretched)	1.8m [39.8in]
Weight	0.8kg [1.8lbs]

Optical characteristics	
Colour temperature	4000K
CRI	80

Electrical characteristics	
Class II insulation (double insulated)	YES

General	
Commercial use warranty	2 years
Applicable standards	EN55015, EN55035, EN60529, EN60598, EN61000
IP rating	IP50
RATstands Part number	66Q62